

MANIACCESS ■ 150 TP

Self-propelled diesel platform boom

- Working height: 15 m
- Capacity: 1 000 kg including 5 persons
- Maximum forward outreach: 6.00 m
- Maximum platform length: 6.50 m
- Lateral and longitudinal slope allowed: 8°



- Real rough terrain
- 4 wheel drive
- 4 wheel steer
- Crab steer
- Gradability: 35%

PRE SERIES



PRE SERIES

150 TP



The working area

Working height	15.00 m
Platform height	13.00 m
Maximum forward outreach (empty)	6.00 m
Maximum forward outreach (1 000 kg)	5.70 m
Back outreach	3.40 m



The platform

Capacity	1 000 kg including 5 persons
Maximum wind speed allowed	45 km/h
① Platform length (Deck extended)	6.50 m
② Platform length	5.00 m
③ Platform width	2.00 m
④ Platform deck height at the bottom	1.55 m



The overall dimensions

⑤ Length	5.35 m
⑥ Width	2.30 m
⑦ Height rails folded	1.90 m
⑧ Height	2.75 m



The Rough Terrain capabilities

Gradability	35%
⑨ Ground clearance	0.40 m
⑩ Wheel base	3.15 m
⑪ Lateral slope allowed	8° (15%)
⑫ Longitudinal allowed	8° (15%)



The diesel engine

Perkins 404 C22	45 cv
Diesel tank	100 l
Hydraulic tank	100 l



The movements



Working speed	0.7 km/h
Travel speed	6 km/h
Lift and down speed	48 s
⑬ Turning radius (inside)	1.70 m
⑭ turning radius (outside)	4.85 m




Weight 7 950 kg

The standards features



- Tyres 18 "
- 4 wheel drive
- 4 wheel steer
- Crab steer
- "Horizontal" platform system
- "Vertical" platform system
- Proportional controls
- Foam filled tyres
- Differential lock
- Limited-slip front axle
- Diagnostic calibrator
- Hourmeter
- Low fuel indicator
- Horn
- Audible and visual tilt and overload alarms
- Lifting eyes
- Manual emergency pump
- Oscillating axle
- Front outriggers
- Frame levelling system

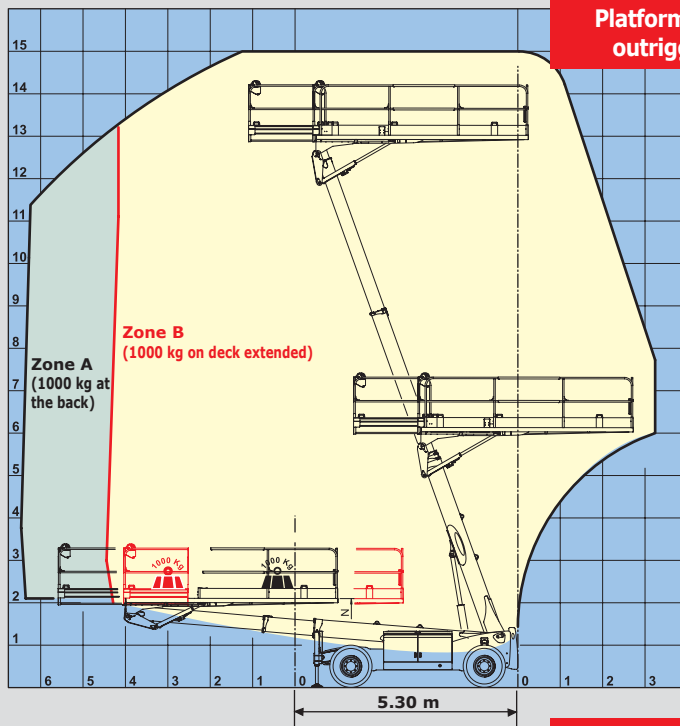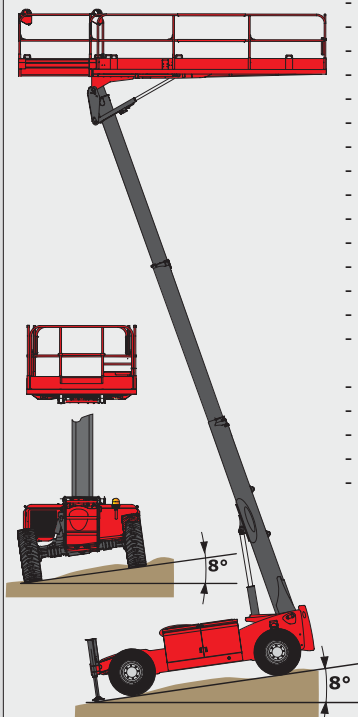

**Set working mode :
Platform with
outriggers**

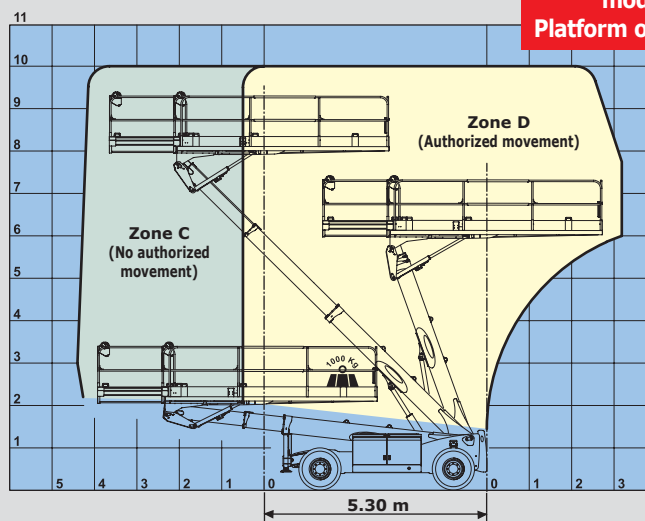

**Moving working
mode :
Platform on wheels**

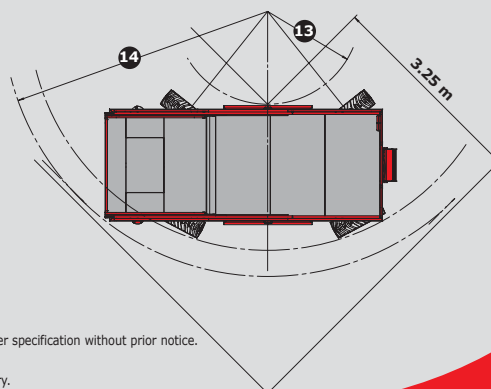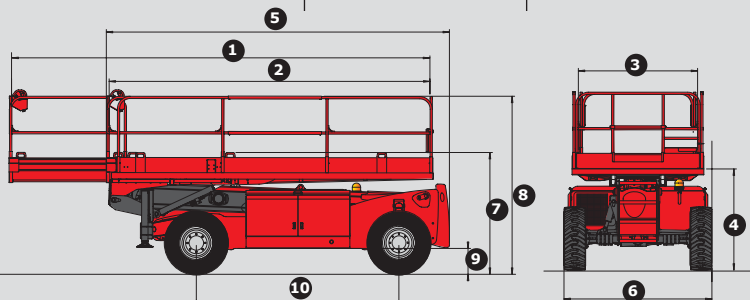

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The equipment supplied with each model may differ from that described in this leaflet.
For more details, contact your MANITOU dealer.
Conformity with the machine directive (EN 280) and standards of the country of delivery.

MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

A Version

