

230 CTJ

- Working height : 23 m
- Load capacity : 227 kg
- Max. offset : 18.30 m
- Diesel engine Isuzu 55 HP
- ROUGH TERRAIN
- Gradeability : 48%



MANIACCESS

CE



230 CTJ



Load capacity227 kg



Working height23 m

Platform floor height21 m

Maximum offset18.30 m



Max.travel speed2.0 km/h



Gradeability48%



Diesel engineIsuzu 4JB1

Power at 2200 rpm44 kw



TransmissionHydrostatic



Capacities

Hydraulic oil150 l

Fuel tank150 l



Length11.57 m

Width2.46 m

Height2.35 m

Platform size1.80 X 0.75 m

Turret rotationcontinuous

Basket rotation180°

Jib movement140°

Ground clearance (under chassis)42.5 cm






Weight15200 kg

Standard equipments :

- H/V control (for horizontal and vertical movement)
- Sandblast protection
- Travel speed control
- Rotation speed control
- Lifting speed control
- All motion alarm
- Lever protection
- 220 V predisposal in the basket

(m)

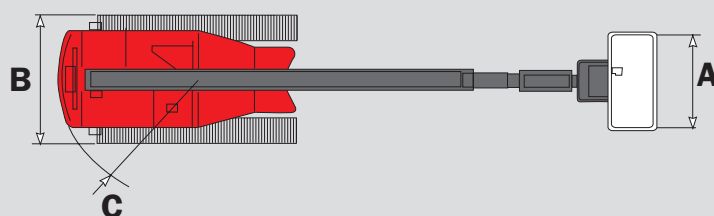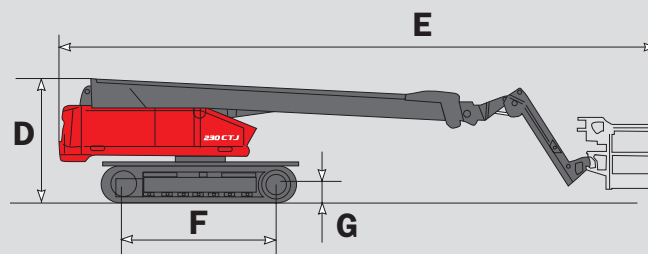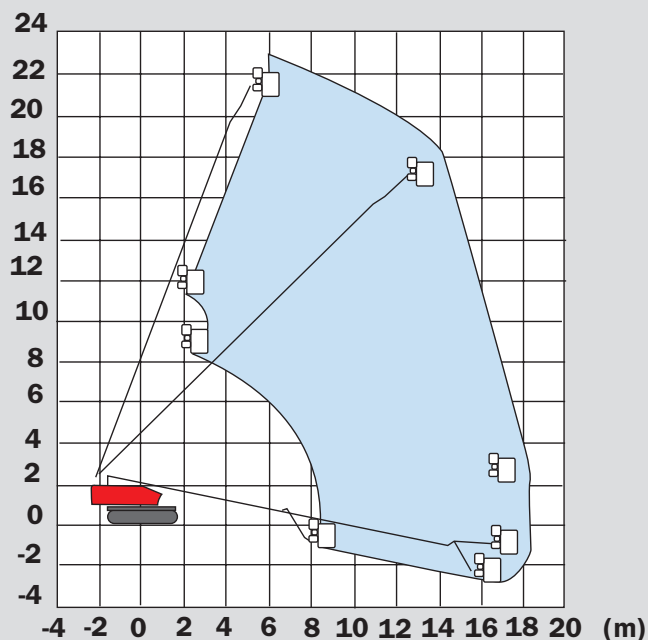

A	1800
B	2460
C	1130
D	2350
E	11570
F	2575
G	425

mm

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments



MANITOU B.F. S.A.

B.P. 249 - 44158 ANCENIS CEDEX - FRANCE
TEL : 33 2 40 09 10 11
EXPORT DEPARTMENT FAX : 33 2 40 09 10 97
www.manitou.com