


MANISCOPIC

MRT 2540
M Series




- Lift height : 24.60 m
- Max. reach : 18.50 m
- Engine : 132 HP - 97 kw
- 4 wheel drive - 4 wheel steer
- Hydrostatic transmission
- Levelling system


ROTATION ON STABILISERS
FULLY EXTENDED WITH FORKS

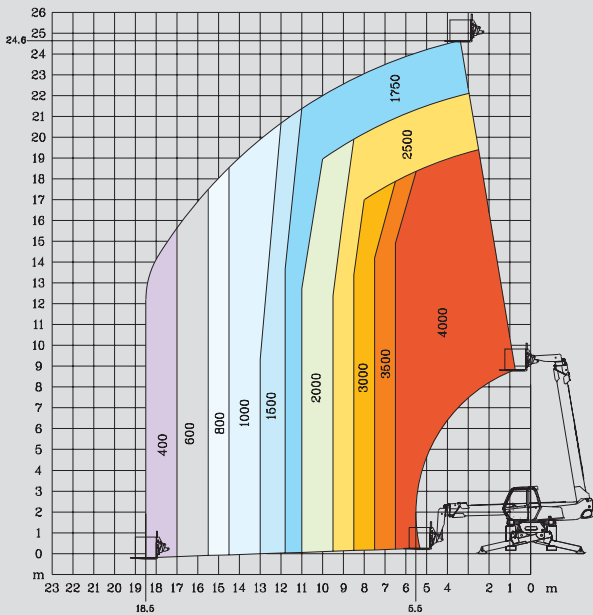


FRONTAL POSITION ON WHEELS
WITH FORKS

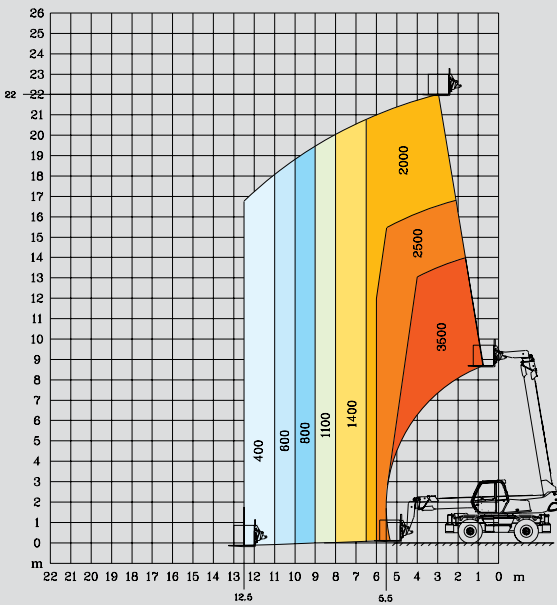


ROTATION ON STABILISERS NOT FULLY EXTENDED
WITH FORKS

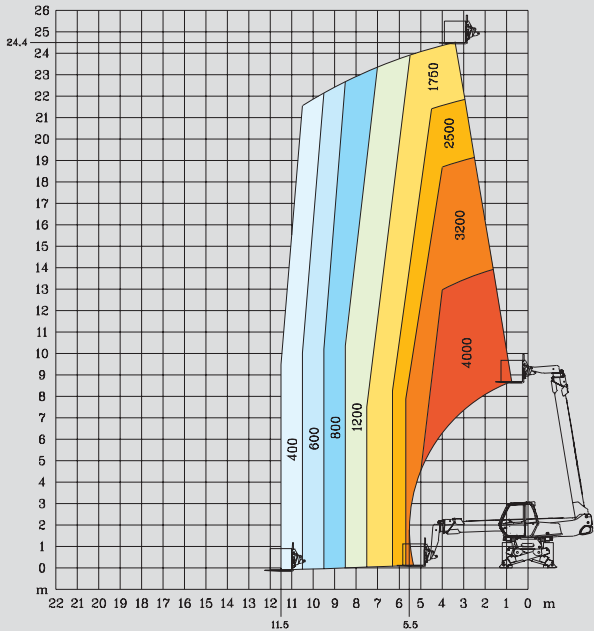


ROTATION ON STABILISERS FULLY EXTENDED
WITH 5T WINCH

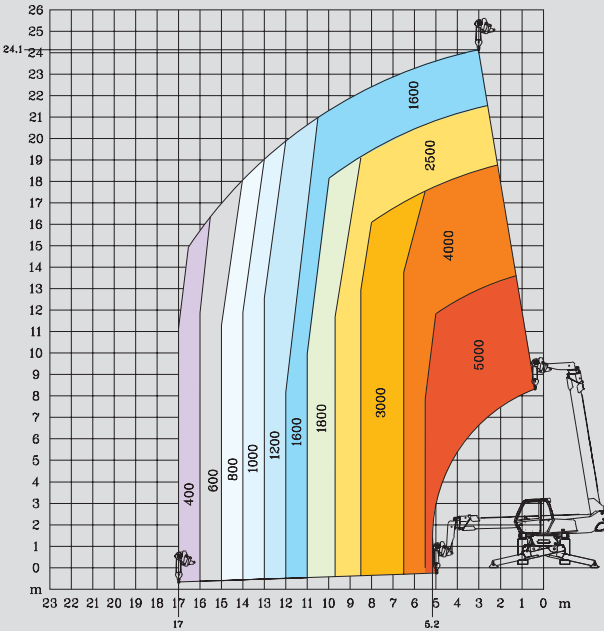


ROTATION ON STABILISERS FULLY EXTENDED
WITH JIB P 600

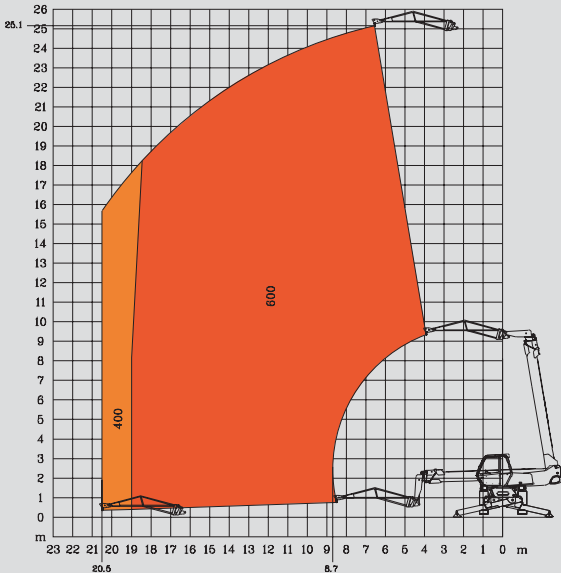


ROTATION ON STABILISERS FULLY EXTENDED
WITH JIB P 1500

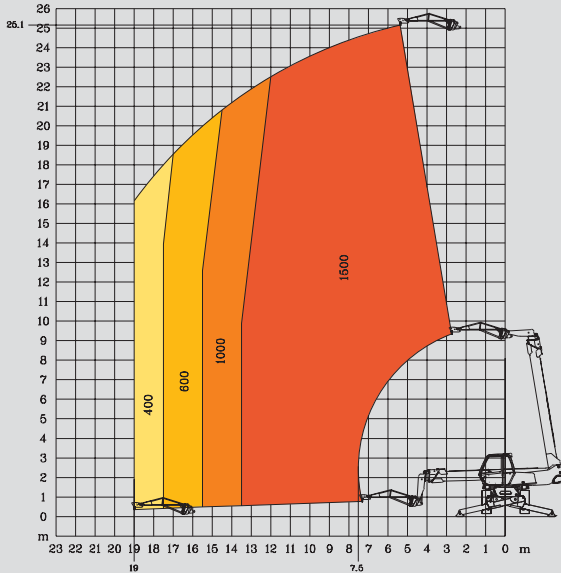


ROTATION ON STABILISERS FULLY EXTENDED
WITH EXTENSIBLE PLATFORM 2,25/4 m

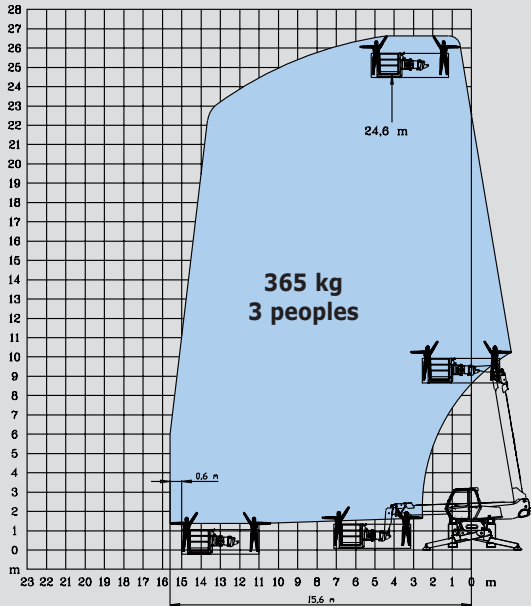


ROTATION ON STABILISERS FULLY EXTENDED
WITH 1000 KG PLATFORM 2,25/4 m

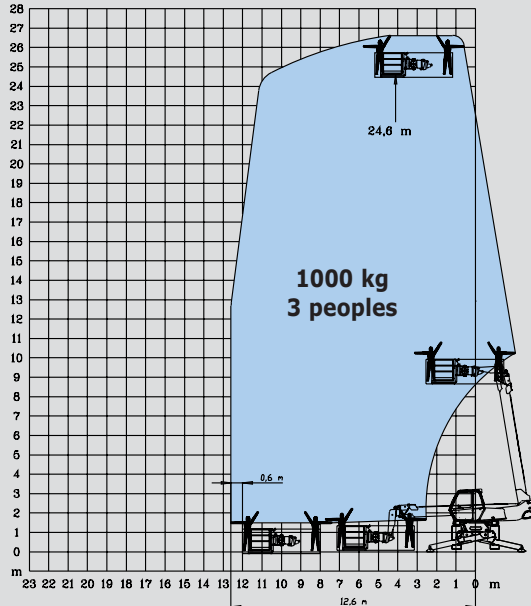


ROTATION ON STABILISERS FULLY EXTENDED
WITH AERIAL JIB PLATFORM

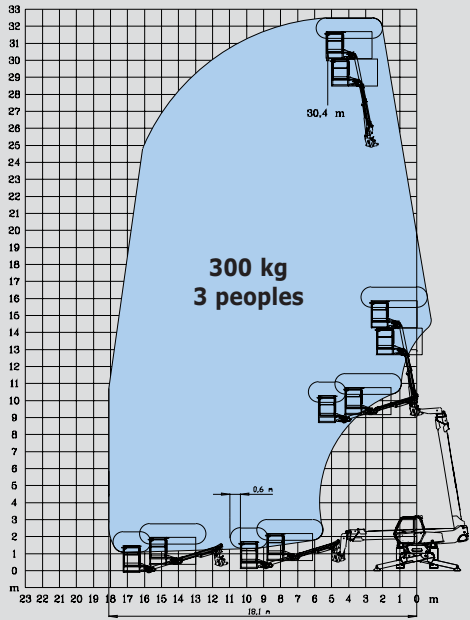


ROTATION ON STABILISERS FULLY EXTENDED
WITH AERIAL JIB 2 PLATFORM
IN POSITIVE POSITION

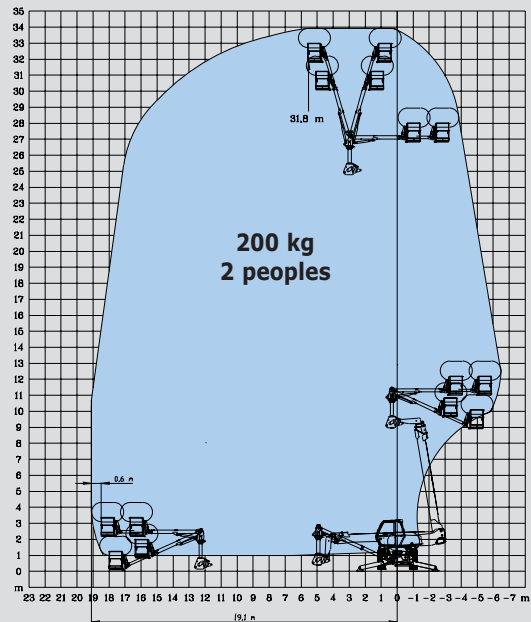

ROTATION ON STABILISERS FULLY EXTENDED
WITH AERIAL JIB 2 PLATFORM
IN NEGATIVE POSITION

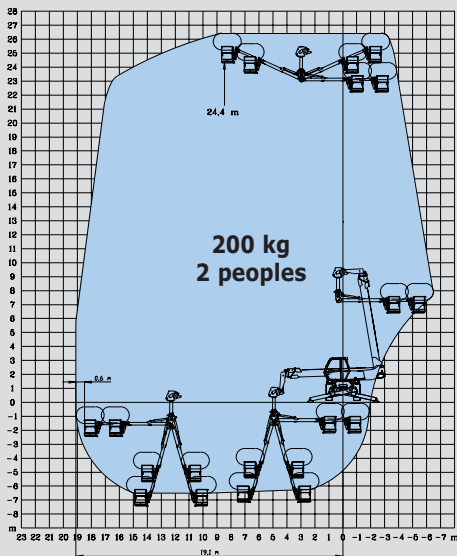

ROTATION ON STABILISERS FULLY EXTENDED
WITH CRANE JIB

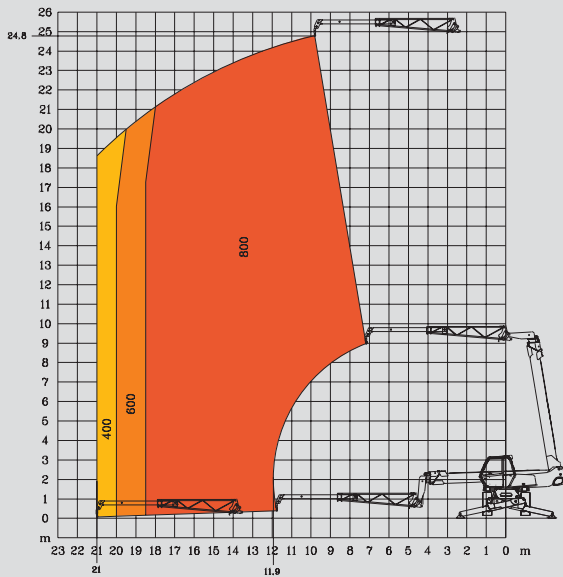

MRT 2540 *M Series*



Lift capacity (on stabilisers)4000 kg
at 500 mm from forks heels



Lift height :24.60 m



Tyres
18 - 22,5



Forks (mm)
Length.....1200
Width x thickness.....150 X 50



Multidisc brakes : hydraulically assisted on both axles
Negative parking brake



Engine PERKINS
Type1104C - 44 TA
Capacity.....4 cyl. 4400 cm³
Power (ISO/TR 14396).....132 HP/97 kw
500 Nm at 1400 rpm
Water cooling
Direct injection



Transmissionhydrostatic
With automatic power regulation (hydraulic variable
displacement pump and motor)
Reversing shiftelectromagnetic
2 speed forward and reverse
Travel speed.....25 km/h



Rear axle
Frame levelling on front axle +/- 8° (15%)
Automatic rear axle locking system
over 15° rotation



4 stabilizers
simultaneous or individually controlled



Total and continuous rotation
Turret mounted on a double slew ring
Hydraulic and electric rotation



Hydraulics
3 pumps gear type270 bars/160 l/mn



Control : 2 electro proportional control joysticks for all
hydraulic movements




Capacities
Cooling system.....15 l.
Engine oil.....11.5 l.
Hydraulic oil200 l.
Fuel tank230 l.



Weight unladen (with forks)17165 kg
Overall width.....2.43 m
Overall height3.02 m
Overall length7.82 m
Ground clearance0.37 m
Drawbar pull10800 daN





Standard load moment indicator
(mobile crane standards)

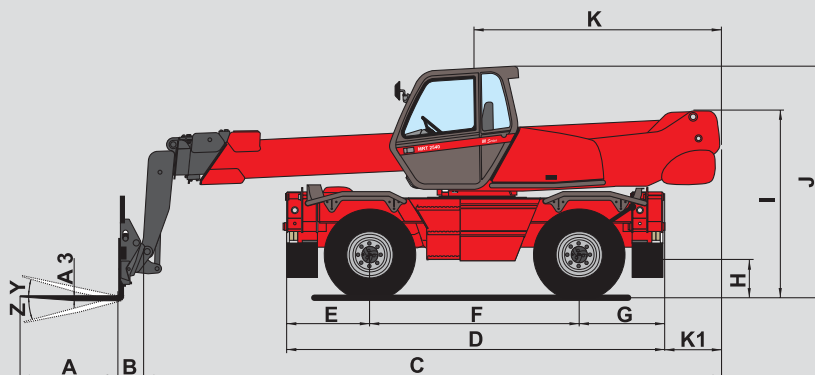

A	1200
A1	150
A2	1030
A3	60
B	290
C	7530
D	5050
E	1155
F	2750
G	1155
H	370
I	2440
J	3025
K	2985
K1	485
L	1930
M	2425
N	4700
O	5100
P	200
Q	4500
R	3800
S	4550
T	4040
U	6700
V	950
Y	12°
Z	105°

mm

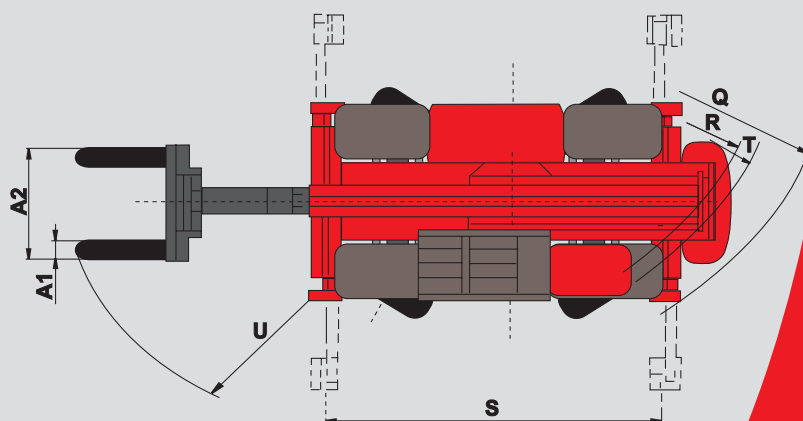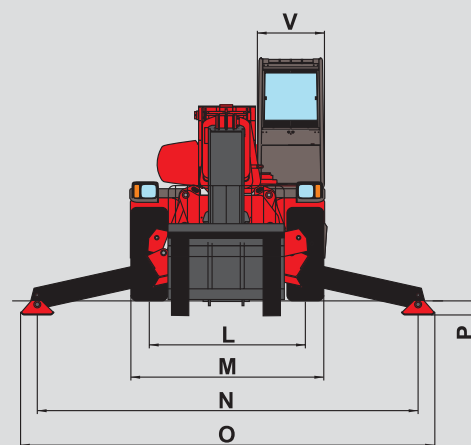

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700041EN

